


XLC VENT

One Way & Two Way

FEATURES:

- Provides pressure equalization in roof system
- Low cost, all-metal breather used for venting all types of insulation
- Spun from heavy gauge aluminum
- An extra wide base opening and security attached cap
- An optional foam insert is available to prevent moisture from condensing on the inside of the standpipe
- Simple & easy to install
- Unique cap design shields against entry of wind-blown rain or snow
- Flange may be coated with PVC or TPO.

WARNING
 Cancer and Reproductive Harm
www.P65Warnings.ca.gov
PVC Only

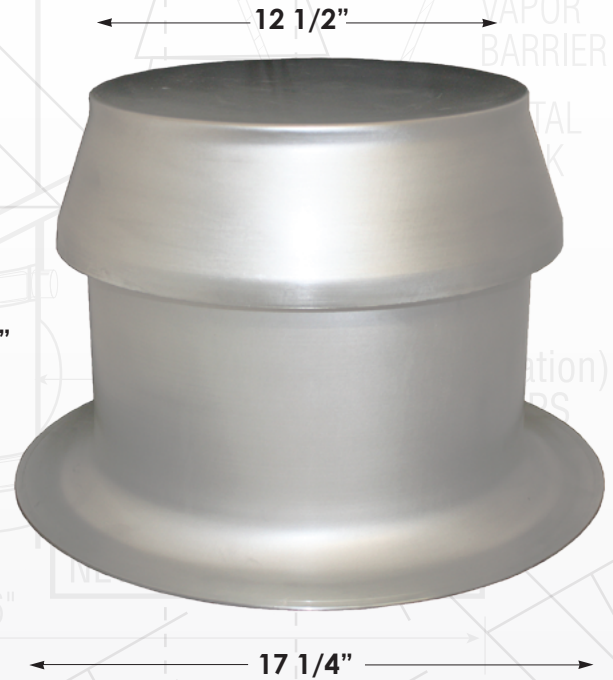


XL CAPACITY VENT (ONE WAY)

(ALUMINUM)

TYPICAL BUR APPLICATION

TYPICAL SINGLE-PLY APPLICATION

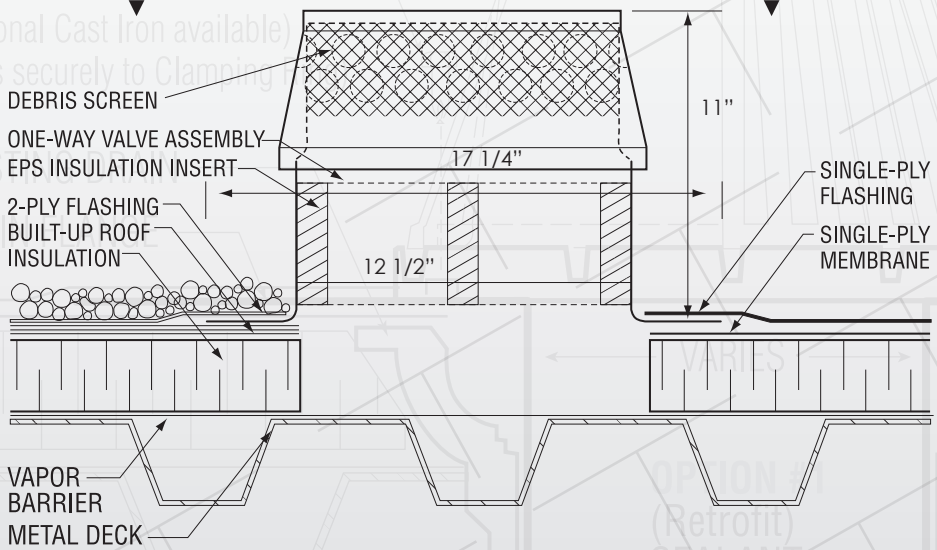

One Way
 Exclusive one-way valve design prevents moisture from re-entering roofing system

Two Way
 Allows for both exhaust and convective movement of air

Note: Some vents are supplied with caps unattached for ease of installation.

PRODUCT SPECIFICATIONS	OVERALL HEIGHT	BASE OPENING	BASE OPENING WITH INSULATION INSERT	FLANGE DIAMETER	FLANGE MATERIAL	RECOMMENDED SPACING
XLC (EXTRA LARGE CAPACITY)	11 1/2 IN. 292MM	12 1/2 IN. 317MM	10"	17 1/4 IN. 438MM	ALUMINUM	1 PER 2000 SQ. FT. 186M ²